



侨毅水科技
QIAOYI WATER TECHNOLOGY

盐氯机

Salt Chlorinator



多模消杀

Multi-mode Sterilization



内置电源

Built-in Power Supply



多层防护

Multi-layer Hardware Protection



智能联动

Intelligent Linkage



宽压兼容

Wide Voltage Compatibility




安全耐久

Safe Reliability




Model 型号	HG-C13K	HG-C20K	HG-C30K	HG-C40K
Chlorine Output 产氯能力	10 g/h	15 g/h	20 g/h	30 g/h
Recommended Pool Size 适合泳池大小	50 m ³	75 m ³	100 m ³	150 m ³
Recommended Salt Concentration 建议盐浓度	2.5-4.0 g/L			
Input Voltage 输入电压	AC 100-240 V(50/60Hz)			
Low Voltage Power Supply 低压供电	0-12 V	0-24 V	0-24 V	0-30 V
Minimum Trigger Flow Rate 最小触发流量	5 m ³ /h			
IP Rating IP等级	IPX4			
Operating Water Temperature 运行水温	10°C-40°C (8°C-40°C allowed in partial modes) 10°C-40°C (部分模式允许 8°C-40°C 运行)			
Ambient Temperature 环境温度	-5°C-50°C (Sheltered Outdoor Use) -5°C-50°C (有遮蔽的户外)			
Storage Temperature 储存环温	-20°C-75°C			
Working Pressure 工作压力	≤0.3Mpa			


产品尺寸 Product Size

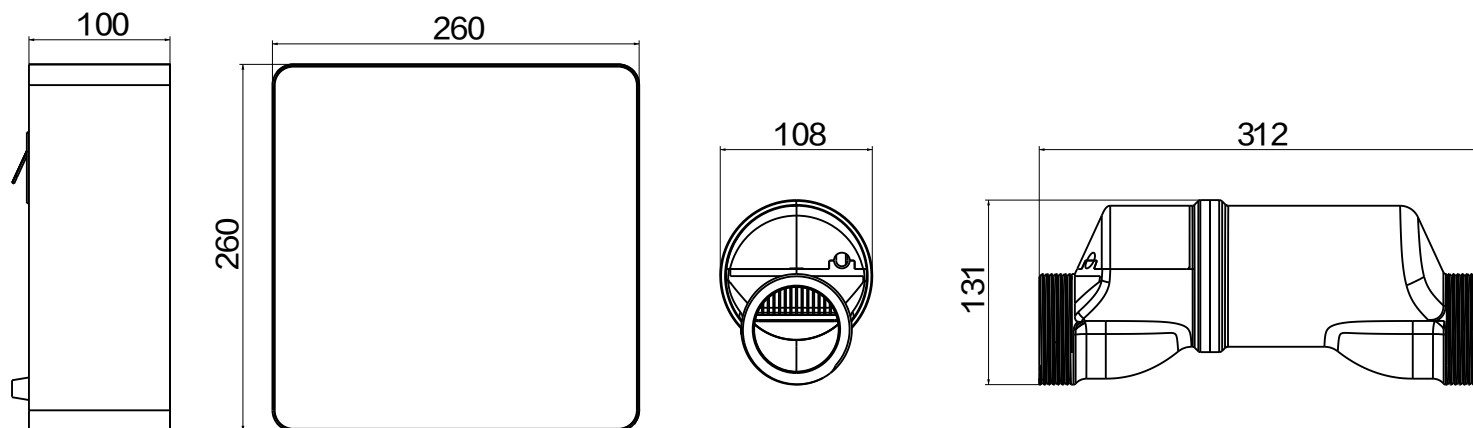

安装流程 Installation process

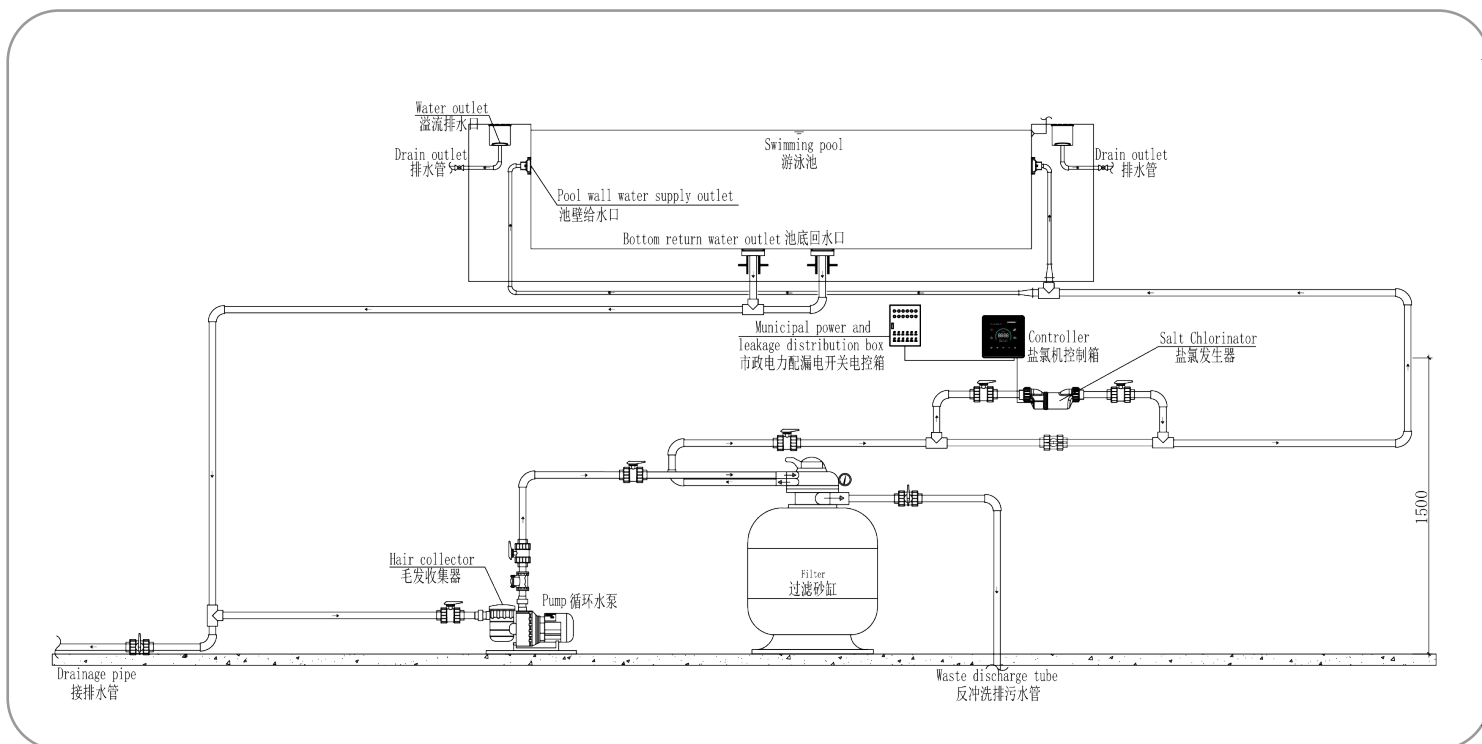

控制器界面 Controller interface

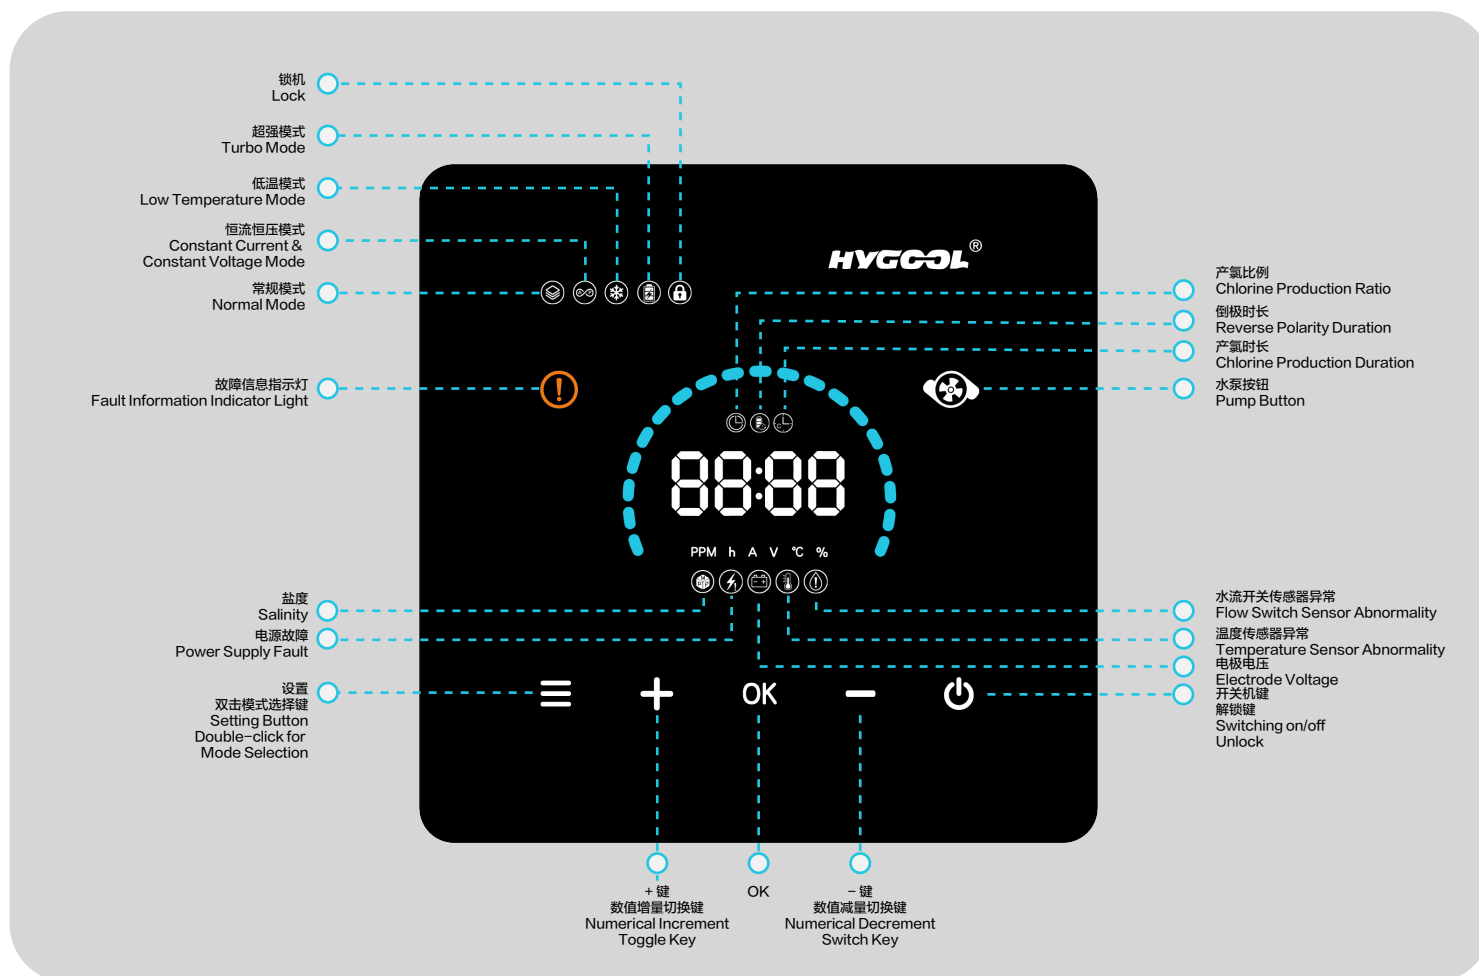

产品特点 Product Features

- 电化学形成消毒氯离子，通过循环系统进入水池，静谧消毒
Electrochemically generates disinfecting chlorine ions, which circulate into the pool for quiet and effective sanitation.
- 动态的泳池含盐量提醒，方便用户对泳池进行维护管理
Dynamic pool salt level alerts, making maintenance and management more convenient for users.
- 工作过程动态进行水温异常监控和智能保护
Real-time monitoring of water temperature anomalies with intelligent protection during operation.
- 工作过程动态进行水流量异常监控和智能保护
Real-time monitoring of water flow anomalies with intelligent protection during operation.
- 自动进行反清洗，或手动进行加强电极结垢清洗
Automatic backwashing, or manual intensive cleaning for electrode scaling.
- 水泵可独立工作，也可以被电控管理联动，达到最好的电机和盐氯消杀互补协同工作
The water pump can operate independently or be linked with electronic control to achieve optimal synergy between motor operation and salt chlorination.
- 航空快插的稳固快速连接
Stable and fast connections with aviation quick-fit fittings.
- 快速维修设计（模块化设计）
Quick maintenance design (Modular Design)
- 内置电源，宽电压范围，基本适合全球所有的国家电网
Built-in power supply with a wide voltage range, compatible with almost all national power grids worldwide.
- 集成式线束
Integrated wiring harness.
- 多种运行模式，可以根据泳池大小和状态，动态设定
Multiple operating modes: dynamically set 35% / 70% / 100% output based on pool size and condition; enhanced disinfection after rain or other scenarios for rapid water purification.
- 内置多种针对电极和控制器寿命的硬件级保护
Built-in hardware-level protection schemes to extend the lifespan of electrodes and the controller.

公司名称：广州市侨毅水处理科技有限公司

Guangzhou Qiaoyi Water Treatment Technology Co., Ltd

公司地址：广东省广州市白云区绿地汇创国际5栋1507

Company Address: Room 1507, Building 5, Greenland Huichuang International, Baiyun District, Guangzhou City, Guangdong Province

工厂地址：广州市白云区广州民营科技园科泰一路3号煜东科技园2号楼六层


Factory Address: 6th Floor, Building 2, Yudong Science and Technology Park, No.3 Ketai 1st Road, Guangzhou Private Science and Technology Park, Baiyun District, Guangzhou City, Guangdong Province

官方网站: www.spagold.cn

Web: www.hygoolpool.com



官方视频号
WeChat Channels



官方抖音号
Douyin



官方微信公众号
Official WeChat Account